




DOUBLE LEAF GATE

The high voltage is transferred onto the gate using a High Voltage Gate Contact. Double leaf gates of up to 8 metres wide can be protected with this section. For gates greater than 8 metres some intermediate sections will also be required.

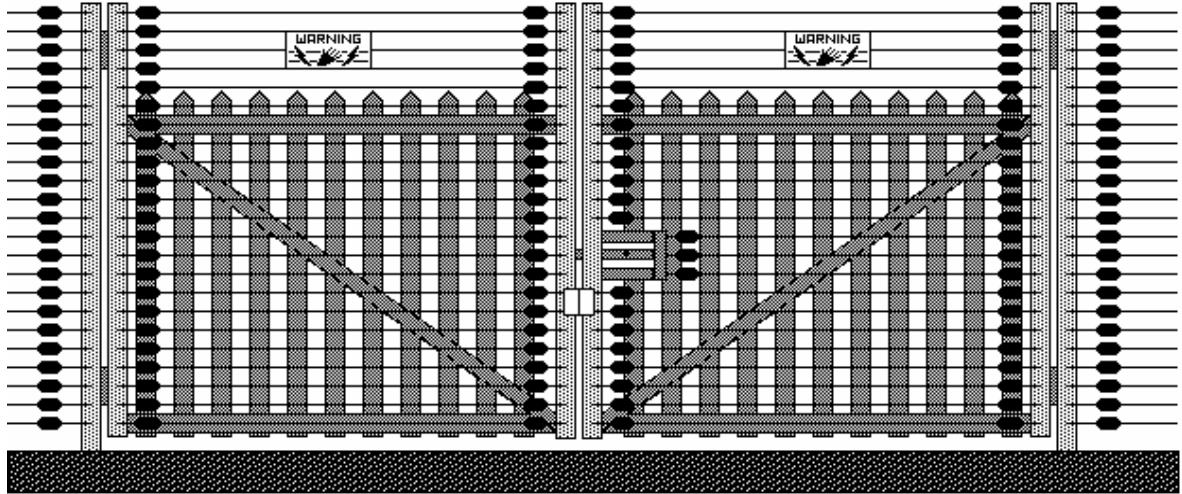

BILL OF MATERIALS

Part No	Description	2.4m Qty	3.0m Qty
EF-220	Electro End Post 2.4m	4	
EF-230	Electro End Post 3.0m		4
EF-280	End Hooks	100	128
EF-270	End Insulator	100	128
EF-302	2mm High Tensile Wire	200 metres	256 metres
EF-410	Wire Clamp	60	74
EF-310	Permanent Wire Tensioner	50	64
EF-415	High Voltage Gate Contact	1	1
EF-430	Warning Sign	2	2
DOUBLE LEAF GATE SECTION PART NO		EF-920	EF-930

ELECTRO-FENCE