




Electro-Fence™ Double Leaf Gate

DOUBLE LEAF GATE

The high voltage is transferred onto the gate using a High Voltage Gate Contact. Double leaf gates of up to 8 metres wide can be protected with this section. For gates greater than 8 metres some intermediate sections will also be required.

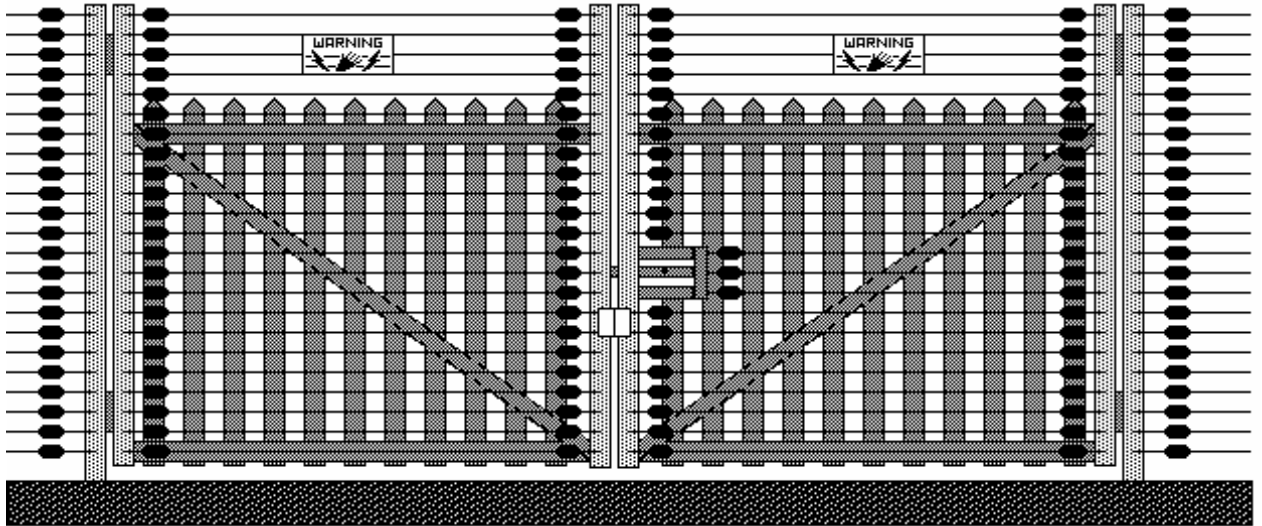

BILL OF MATERIALS

| Part No | Description | 2.4m Qty | 3.0m Qty |
|---|---------------------------|---------------|---------------|
| EF-220 | Electro End Post 2.4m | 4 | |
| EF-230 | Electro End Post 3.0m | | 4 |
| EF-280 | End Hooks | 100 | 128 |
| EF-270 | End Insulator | 100 | 128 |
| EF-302 | 2mm High Tensile Wire | 200 metres | 256 metres |
| EF-410 | Wire Clamp | 60 | 74 |
| EF-310 | Permanent Wire Tensioner | 50 | 64 |
| EF-415 | High Voltage Gate Contact | 1 | 1 |
| EF-430 | Warning Sign | 2 | 2 |
| DOUBLE LEAF GATE SECTION PART NO | | EF-920 | EF-930 |

ELECTRO-FENCE