




## SINGLE LEAF GATE

The high voltage is transferred onto the gate using a High Voltage Gate Contact. Single leaf gates of up to 4 metres wide can be protected with this section. For gates greater than 4 metres some intermediate sections will also be required.

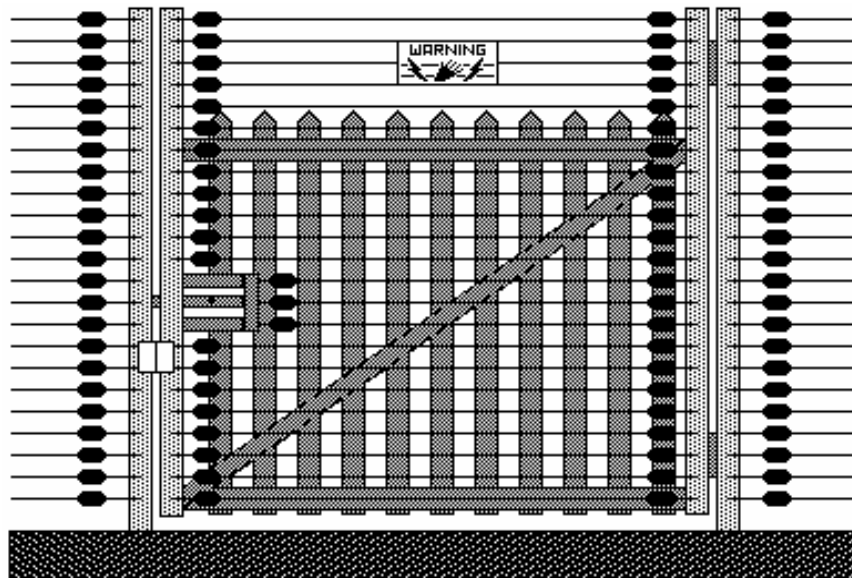

### BILL OF MATERIALS

| Part No                                 | Description               | 2.4m Qty      | 3.0m Qty      |
|---|---------------------------|---------------|---------------|
| EF-220                                  | Electro End Post 2.4m     | 2             |               |
| EF-230                                  | Electro End Post 3.0m     |               | 2             |
| EF-280                                  | End Hooks                 | 50            | 64            |
| EF-270                                  | End Insulator             | 50            | 64            |
| EF-302                                  | 2mm High Tensile Wire     | 100 metres    | 128 metres    |
| EF-410                                  | Wire Clamp                | 31            | 38            |
| EF-310                                  | Permanent Wire Tensioner  | 25            | 32            |
| EF-415                                  | High Voltage Gate Contact | 1             | 1             |
| EF-430                                  | Warning Sign              | 1             | 1             |
| <i>SINGLE LEAF GATE SECTION PART NO</i> |                           | <i>EF-900</i> | <i>EF-910</i> |

ELECTRO-FENCE